




COOKSON DOOR SALES OF ARIZONA

We want to be Your Door Company

What measurements to look at before purchasing a new garage door:

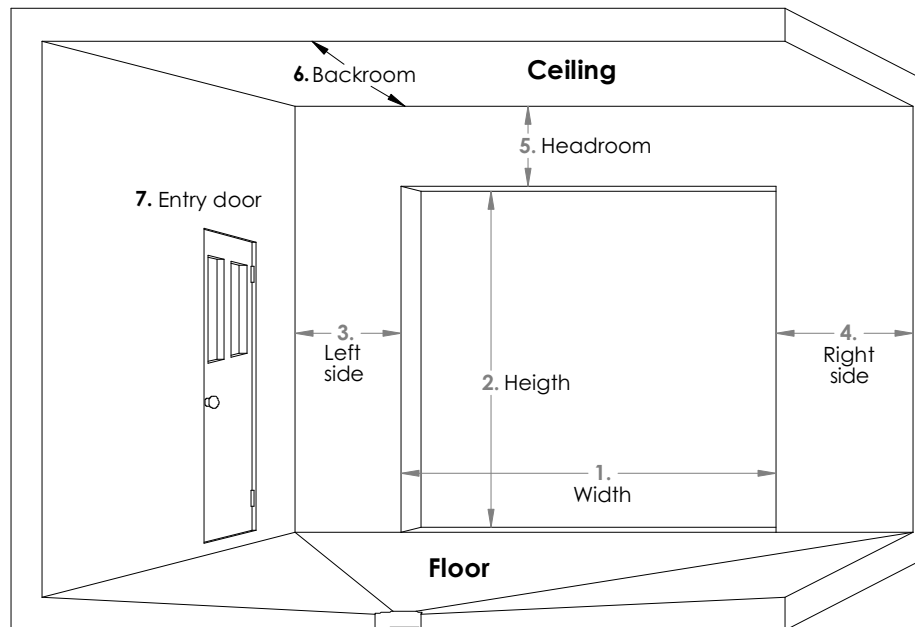

Step #1

To determine the size of the door needed, all you have to do is to measure the opening (references # 1 & 2): the door should be the same size. Make sure the door frames are squared. If they are not, make the correction, or adjust the door size to cover the whole opening.

1(Width)= _____ 2(Height)= _____

Step #2

You need a minimum of 5-1/2" inches on each side of the door for the installation of the vertical tracks (references # 3 & 4). Again make sure you have this space available, or you will have to narrow the opening, and the door.

3= _____ 4= _____

Step #3

Headroom (reference #5) is the distance between the top of the door opening (jamb header) and the ceiling or floor joists. You need 12 inches for a torsion spring system, PLUS 2 inches for the installation of an electric door opener if required. Special low headroom hardware are available for limited headroom. Contact a professional for more information.

5. _____

Step #4

Backroom (reference #6) is calculated from the distance between the front wall to the back wall of the garage. You need a backroom equal to the door height +26 inches. The installation of an electric door opener will require a backroom equal to the door height + 43 inches.

6. _____

Step #5

An entry door on a side wall (reference # 7) of the garage, with or without steps to the house, may provoke a situation where the entry door will hit the horizontal tracks of the garage, or a person will hit the track with their head. Be aware of this possibility, and should this problem occur, contact a professional to get suggestions to handle it.

Step #6

2 x 6 door bucks run from the floor to the ceiling on both sides (the distance between these door bucks should be the same size as your door). A horizontal 2 x 6 runs horizontally across the header at the height of your door. A 2 x 6 spring pad sits on top of the horizontal 2 x 6 going up to the ceiling. This is what the springs and the motor will mount to. Note: Some door sizes such as 10'-0" and 12'-0" wide require an additional support. Contact your sales representative for details.